Touch Kiosk



Ð

Round-the-clock operation

displays can be used as reliable digital signage for both offline and cloud based content 24 hours a day, 7 days a week.

Overview



Touch Capability

This display features touch capabilities, allowing you to interact with customers more effectively and efficiently.



400 nits

This display offers bright, clear images with up to 400 nits, ideal for indoor use with excellent visibility in well-lit environments.



Full HD

ensures perfect colour and rich details in all possible broadcasting surroundings, ranging from shops, to restaurants and office buildings.



Specifications 32"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH320 LXH
Size:	32"
Resolution:	1920 x 1080 (Full HD)
Brightness:	400 cd/m2
Contrast (Typ):	1200:1
Orientation:	Landscape
Operating Hours:	24 / 7
Response time:	8 ms
Aspect ratio:	16:9
Display Area W x H:	392,9 x 698,4 mm



Touch

Specification:	Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤10 ms
Output Resolutions:	8192 x 8192



Built in speaker:

2 x 5 W (8Ω)



Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 70 W
Standby Power Consumption:	< 5 W



Environment

Operation Temperature:	$0 \sim 50 \text{ C}$
Operation Humudity:	20% ~ 80 %



Operating System

OS:



Connectivity

HDMI out	1 x
USB	4 x
RJ45	1 x
LAN	1 x
WiFi	Included

Windows




Physical


Bezel Color:	White, Metal case SPCC	
Installation:	Floor Standing	
Protection:	AG Glass	





Standard Certification:	CE, FCC, ROHS
Quality Standard	ISO9001, CCC


Dimensions 32"

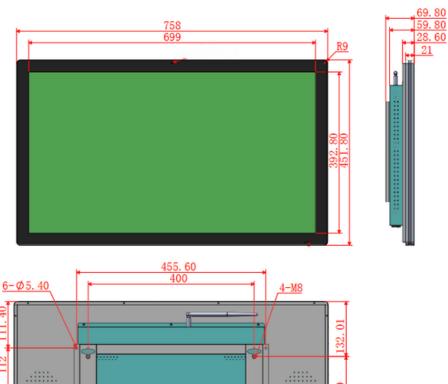

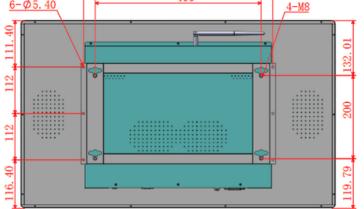







Specifications 55"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH550 LXH
Size:	55"
Resolution:	1920 x 1080 (Full HD)
Brightness:	400 cd/m2
Contrast (Typ):	1200:1
Orientation:	Landscape
Operating Hours:	24 / 7
Response time:	8 ms
Aspect ratio:	16:9
Display Area W x H:	1209,6 x 680,4 mm



Touch

Specification:	Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	8192 x 8192
Life Time:	More than 600 million times



Built in speaker:

2 x 5 W (8Ω)



Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 150 W
Standby Power Consumption:	< 5 W



Operation Temperature:	$0 \sim 50 \text{ C}$
Operation Humudity:	20% ~ 80 %



OS Operating System

OS:

Android 11



Connectivity

HDMI out	1 x	
USB	4 x	
RJ45	1 x	
LAN	1 x	
WiFi	Included	



Physical

Bezel Color:	White, Metal case SPCC
Installation:	Floor Standing
Protection:	AG Glass



Standard Certification:	CE, FCC, ROHS
Quality Standard	ISO9001, CCC

Dimensions 55"

