

Touch-Screen Wall mounted



Overview



Round-the-clock operation

Displays can be used as reliable digital signage for both offline and cloud based content 24 hours a day, 7 days a week.



Landscape & Portrait

Providing you with endless creative and functional possibilities to fulfil your commercial or informative goals.




Up to 3000 nits

Depending on the size, this display offers a brightness range of 350 to 3000 nits, ensuring sharp and vivid visuals tailored for indoor environments with varying lighting conditions.



Full HD

Depending on the size, this display offers a resolution range from Full HD to 4K, delivering stunning clarity and sharp details for an immersive viewing experience across various applications.

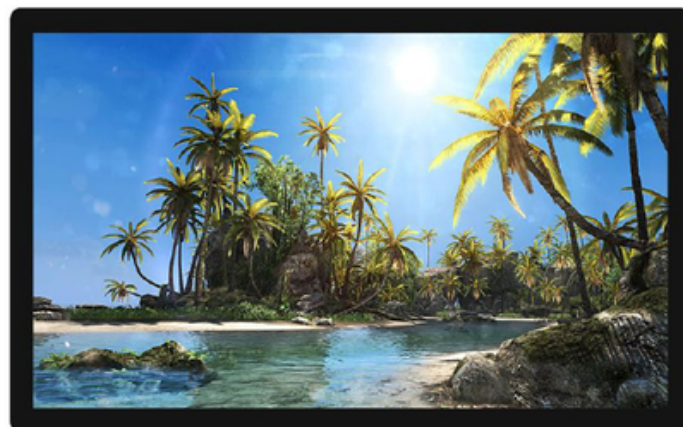

Specifications 32"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH320 PBH
Size:	32"
Resolution:	1920 x 1080 (Full HD)
Brightness:	350 cd/m2
Contrast (Typ):	1100 : 1
Orientation:	Portrait & Landscape
Operating Hours:	24 / 7
Response time:	8 ms
Aspect ratio:	16 : 9
Display Area W x H:	392,85 x 698,4 mm



Touch

Specification:	Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096



Speaker

Built in speaker:	2 x 5 W (8Ω)
--------------------------	--------------



Power

Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 70 W
Standby Power Consumption:	< 5 W



Environment

Operation Temperature:	0 ~ 50 C
Operation Humidity:	20% ~ 80 %



Operating System

OS:	Android 13
------------	------------



Connectivity

WLAN	2,4 / 5 GHZ
HDMI in	1 x
USB	2 x
RJ45	1 x



Physical



Bezel Color:	Black & Silver Frame, Metal case SPCC
Installation:	Wall mounted



Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard	ISO9001, CCC

Dimensions 32"

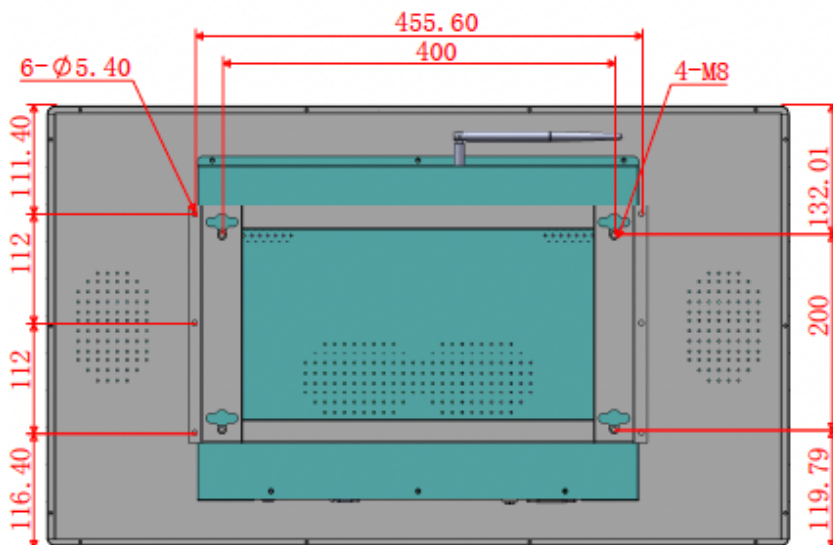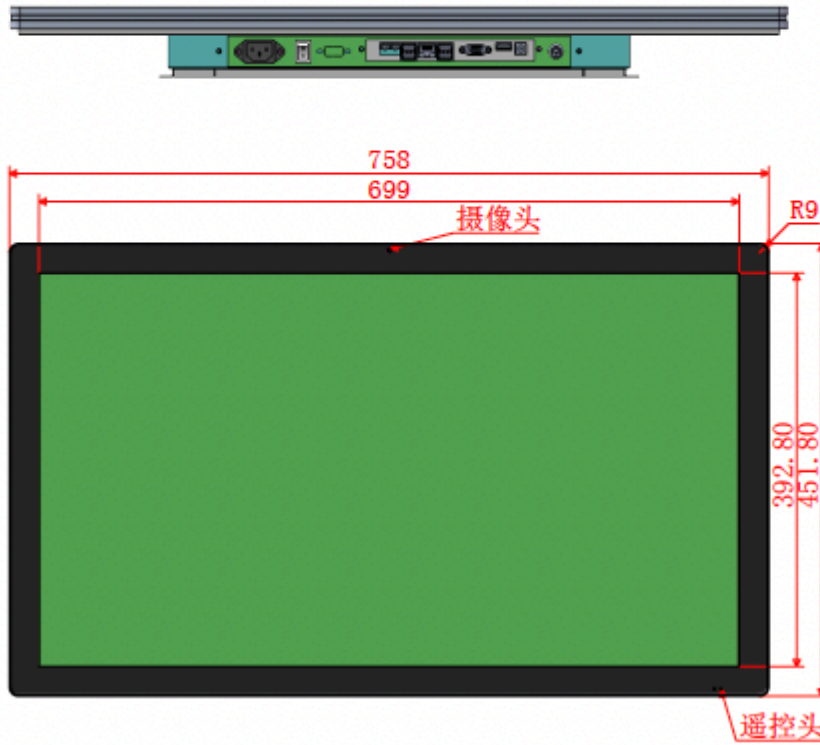

Specifications 43"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH430 PBH
Size:	43"
Resolution:	1920 x 1080 (Full HD)
Brightness:	350 cd/m2
Contrast (Typ):	1200 : 1
Orientation:	Portrait & Landscape
Operating Hours:	24 / 7
Response time:	8 ms
Aspect ratio:	16 : 9
Display Area W x H:	941,18 x 529,41 mm



Touch

Specification:	Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096



Speaker

Built in speaker:	2 x 5 W (8Ω)
--------------------------	--------------



Power

Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 180 W
Standby Power Consumption:	< 5W



Environment

Operation Temperature:	0 ~ 50 C
Operation Humidity:	20% ~ 80 %



Operating System

OS:	Android 13
------------	------------



Connectivity

WLAN	2,4 / 5 GHZ
HDMI in	1 x
USB	1 x
RJ45	1 x



Physical



Bezel Color:	Black & Silver Frame, Metal case SPCC
Installation:	Wall mounted



Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard	ISO9001, CCC

Dimensions 43"

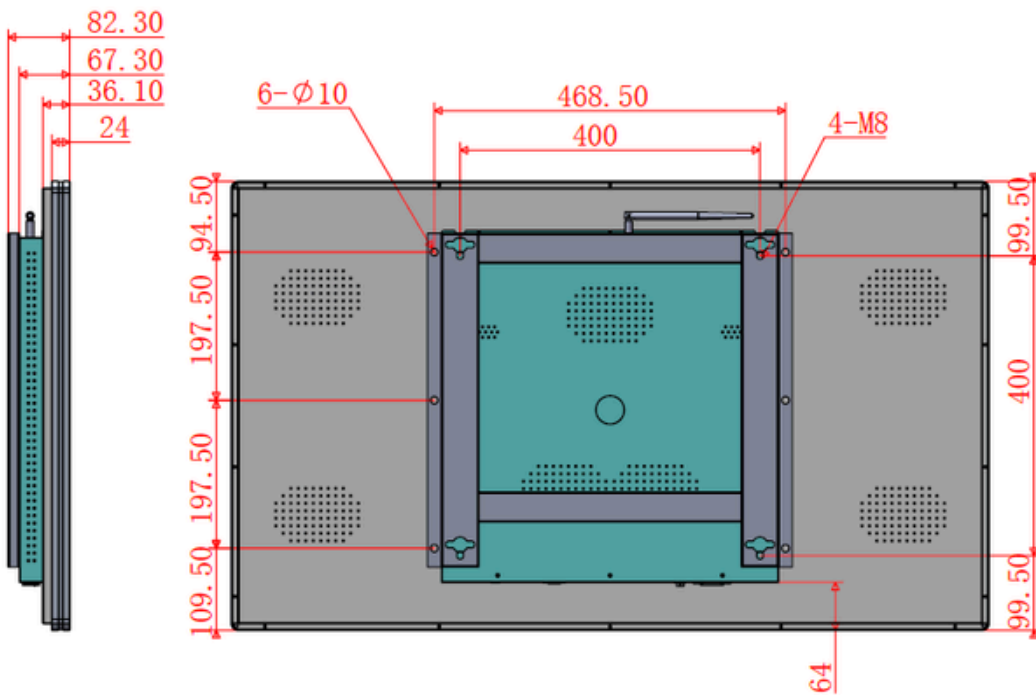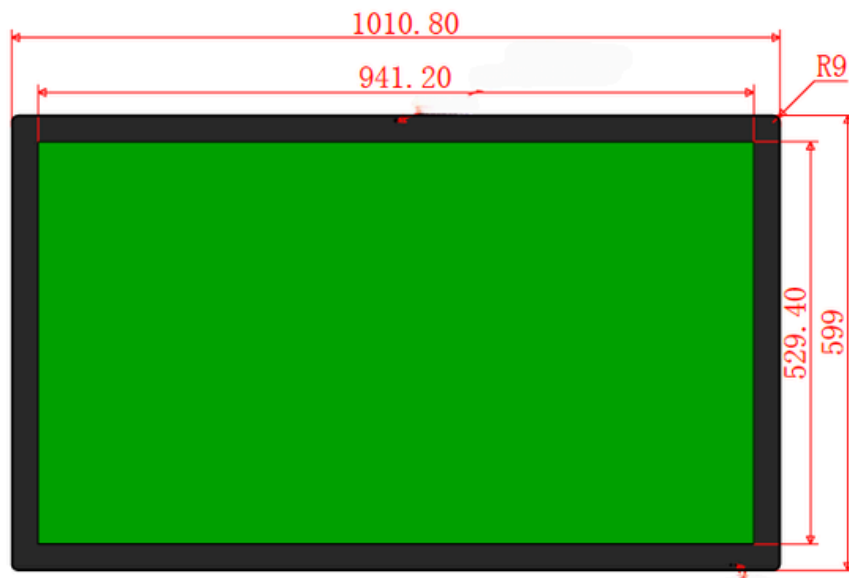

Specifications 49"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH490 PBH
Size:	49"
Resolution:	1920 x 1080 (Full HD)
Brightness:	350 cd/m2
Contrast (Typ):	1200 : 1
Orientation:	Portrait & Landscape
Operating Hours:	24 / 7
Response time:	8 ms
Aspect ratio:	16 : 9
Display Area W x H:	1073,78 x 604 mm



Touch

Specification:	Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096



Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



Power

Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 180 W
Standby Power Consumption:	< 5W



Environment

Operation Temperature:	0 ~ 50 C
Operation Humidity:	20% ~ 80 %



Operating System

OS:	Android 13
-----	------------



Connectivity

WLAN	2,4 / 5 GHZ
HDMI in	1 x
USB	1 x
RJ45	1 x



Physical


Bezel Color:	Black & Silver Frame, Metal case SPCC
Installation:	Wall mounted



Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard	ISO9001, CCC

Dimensions 49"

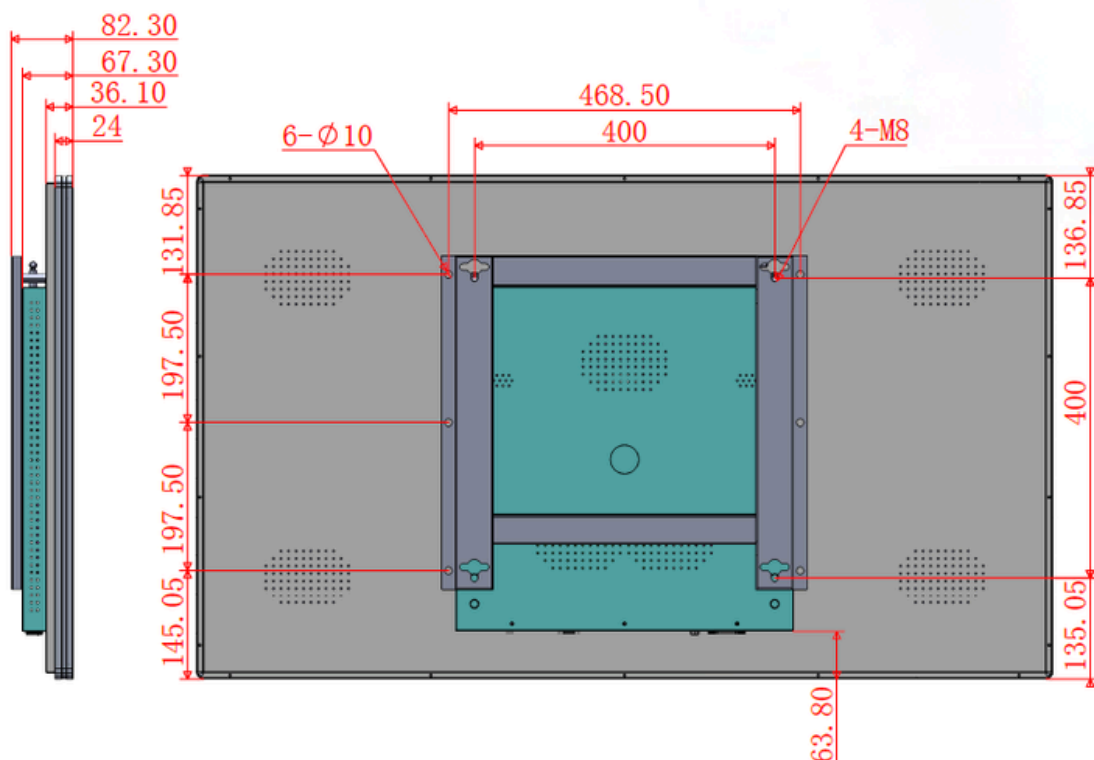

Specifications 55"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH550 PBH
Size:	55"
Resolution:	3840 x 2160 (4K)
Brightness:	350 cd/m2
Contrast (Typ):	1200 : 1
Orientation:	Portrait & Landscape
Operating Hours:	24 / 7
Response time:	8 ms
Aspect ratio:	16 : 9
Display Area W x H:	1209,6 x 680,4 mm



Touch

Specification:	Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096



Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



Power

Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 180 W
Standby Power Consumption:	< 5W



Environment

Operation Temperature:	0 ~ 50 C
Operation Humidity:	20% ~ 80 %



Operating System

OS:	Android 13
-----	------------



Connectivity

WLAN	2,4 / 5 GHZ
HDMI in	1 x
USB	1 x
RJ45	1 x



Physical



Bezel Color:	Black & Silver Frame, Metal case SPCC
Installation:	Wall mounted



Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard	ISO9001, CCC

Dimensions 55"

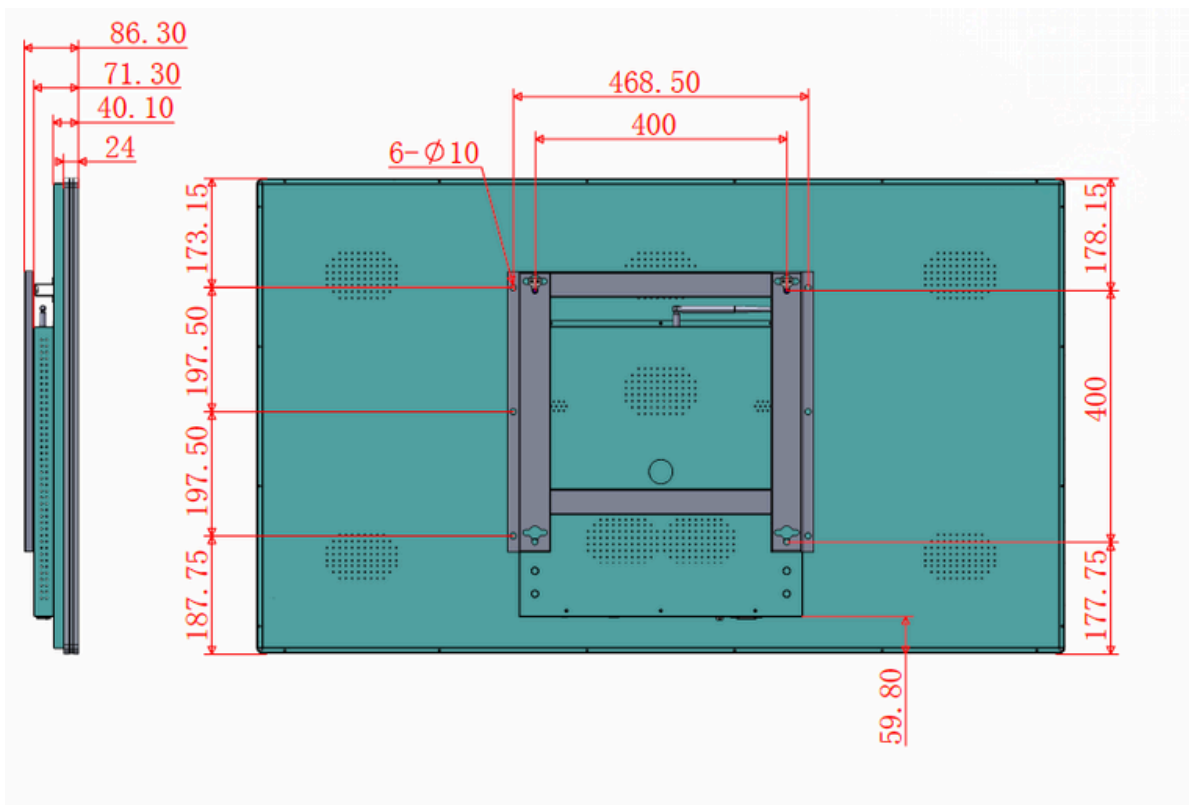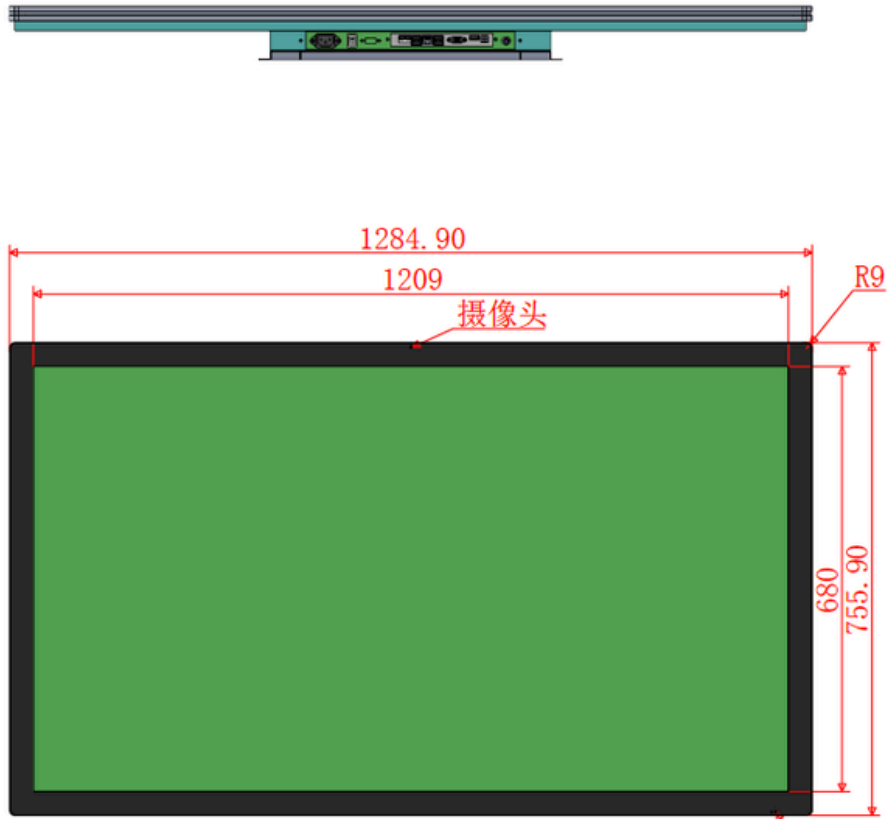

Specifications 65"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH650 PBH
Size:	65"
Resolution:	3840 x 2160 (4K)
Brightness:	350 cd/m2
Contrast (Typ):	1200 : 1
Orientation:	Portrait & Landscape
Operating Hours:	24 / 7
Response time:	8 ms
Aspect ratio:	16 : 9
Display Area W x H:	1428,48 x 803,52 mm



Touch

Specification:	Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096



Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



Power

Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 180 W
Standby Power Consumption:	< 5W



Environment

Operation Temperature:	0 ~ 50 C
Operation Humidity:	20% ~ 80 %



Operating System

OS:	Android 13
-----	------------



Connectivity

WLAN	2,4 / 5 GHZ
HDMI in	1 x
USB	1 x
RJ45	1 x



Physical



Bezel Color:	Black & Silver Frame, Metal case SPCC
Installation:	Wall mounted



Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard	ISO9001, CCC

Dimensions 65"

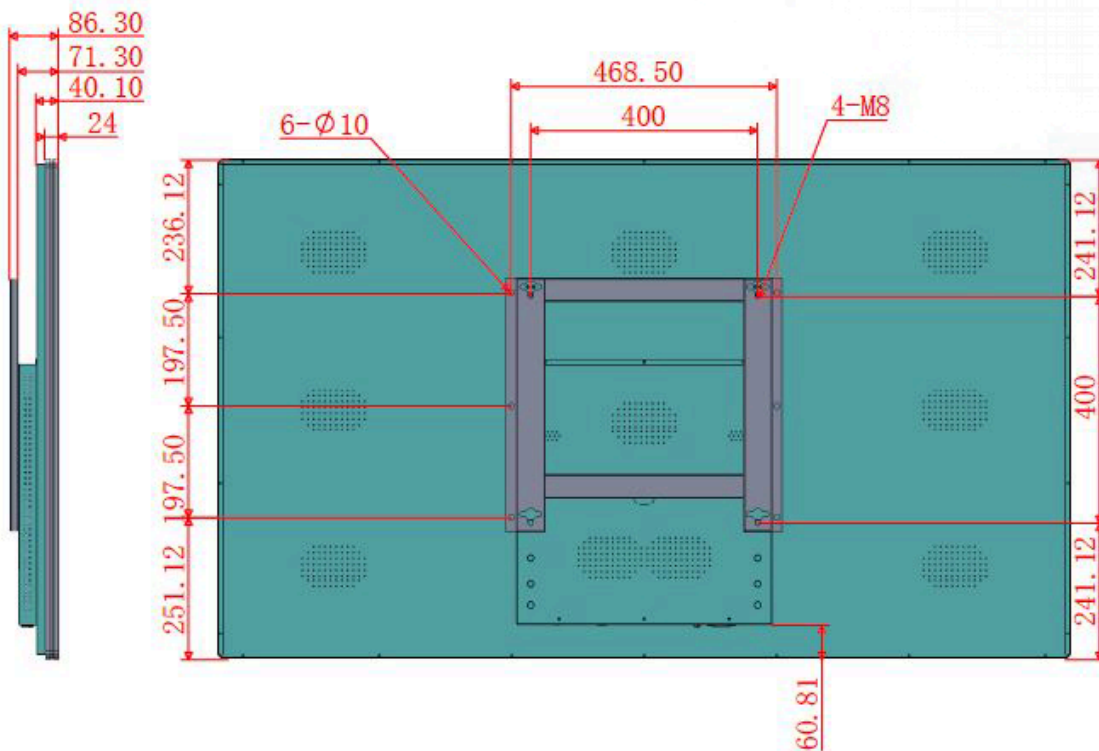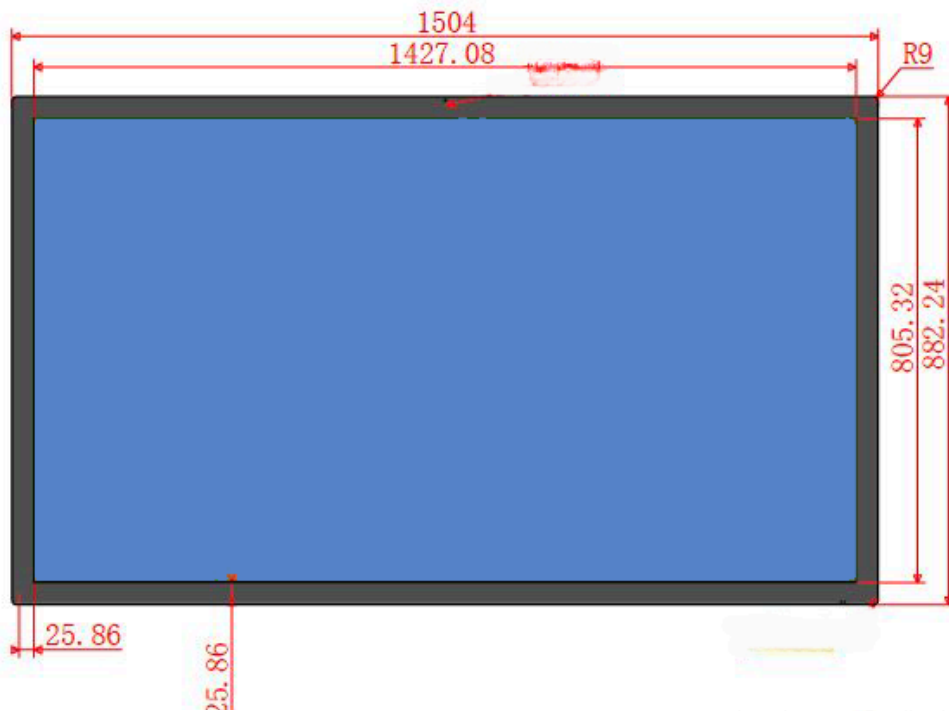

Specifications 75"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH750 PLS
Size:	75"
Resolution:	3840 x 2160 (4K)
Brightness:	500 cd/m2
Contrast (Typ):	1200 : 1
Orientation:	Portrait & Landscape
Operating Hours:	24 / 7
Response time:	8 ms
Aspect ratio:	16 : 9
Display Area W x H:	1649,66 x 927,93



Touch

Specification:	Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096



Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



Power

Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 250 W
Standby Consumption:	< 5W



Environment

Operation Temperature:	0 ~ 50 C
Operation Humidity:	20% ~ 80 %



Operating System

OS:	Android 13
-----	------------



Connectivity

WLAN	2,4 / 5 GHZ
SIM	4G / 5G
HDMI in	1 x
VGA in	1 x
USB	1 x



Physical



Bezel Color:	Black, Metal case SPCC
Installation:	Wall mounted



Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard:	ISO9001, CCC

Dimensions 75"

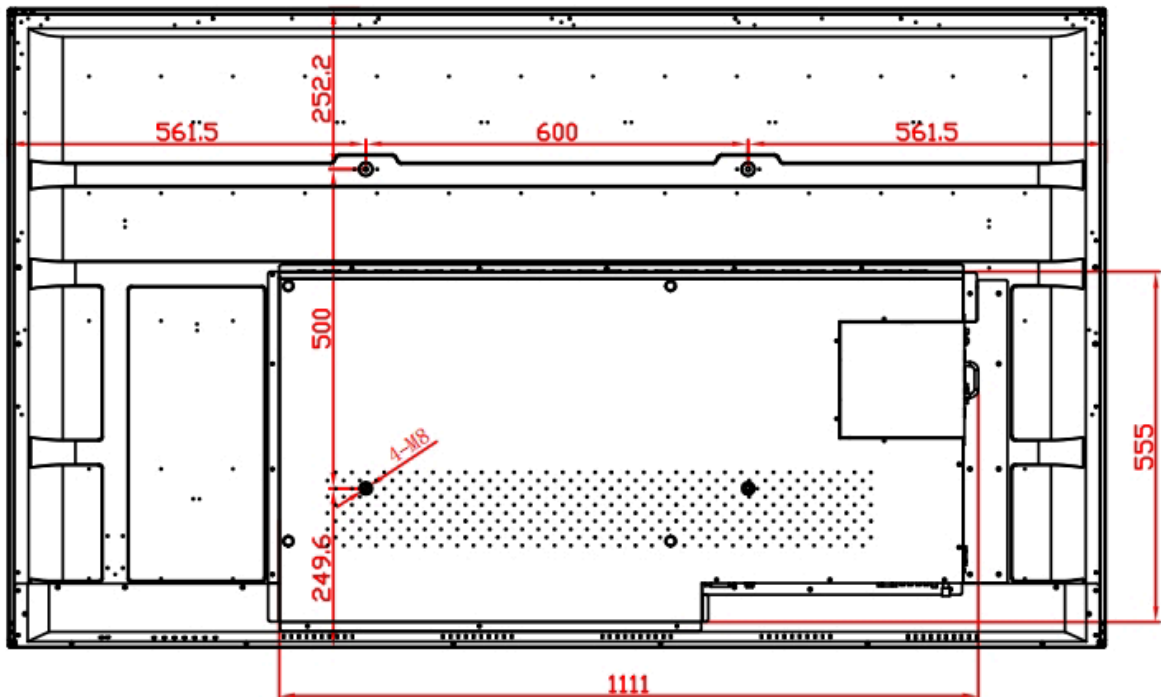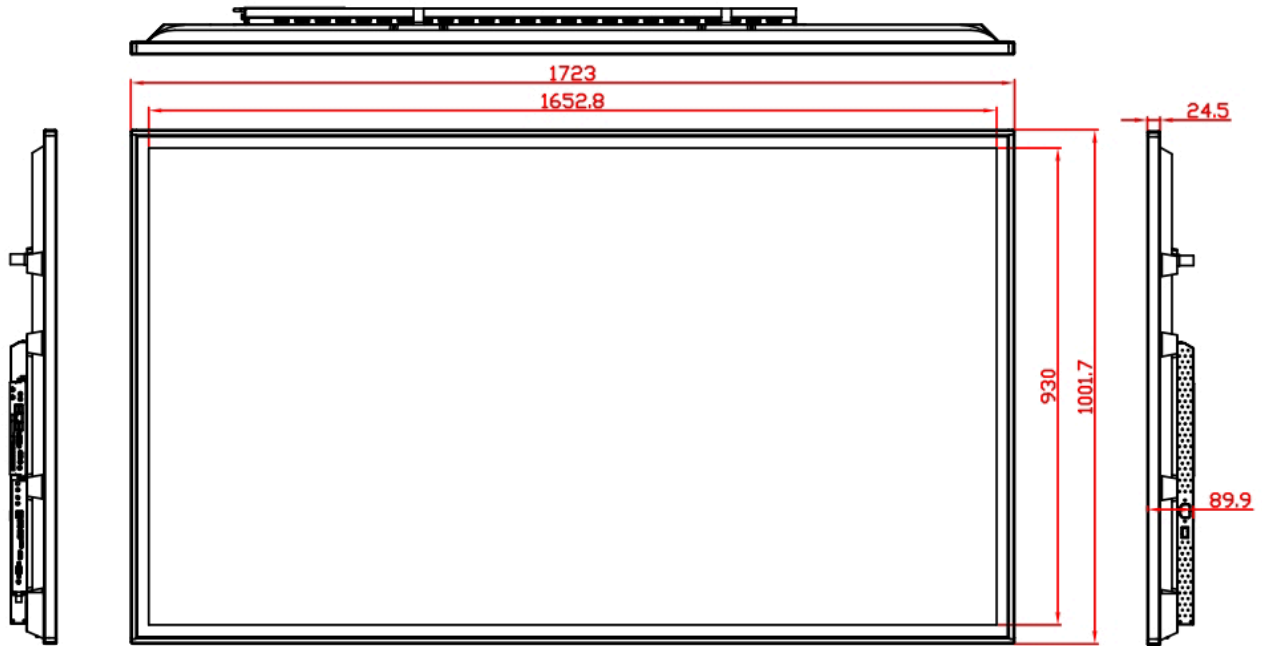

Specifications 86"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH860 PLS
Size:	86"
Resolution:	3840 x 2160 (4K)
Brightness:	350 cd/m2
Contrast (Typ):	1200 : 1
Orientation:	Portrait & Landscape
Operating Hours:	24 / 7
Response time:	8 ms
Aspect ratio:	16 : 9
Display Area W x H:	1895,04 x 1065,96 mm



Touch

Specification:	Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096



Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



Power

Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 250 W
Standby Consumption:	< 5W



Environment

Operation Temperature:	0 ~ 50 C
Operation Humidity:	20% ~ 80 %



Operating System

OS:	Android 13
-----	------------



Connectivity

WLAN	2,4 / 5 GHZ
SIM	4G / 5G
HDMI in	1 x
VGA in	1 x
USB	1 x



Physical

Bezel Color:	Black, Metal case SPCC
Installation:	Wall mounted



Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard:	ISO9001, CCC

Dimensions 86"

