

# Outdoor Steele Touch/Nontouch




## Overview



### Round-the-clock operation

Displays can be used as reliable digital signage for both offline and cloud based content 24 hours a day, 7 days a week.



### Single & Double Sided

Enjoy your Advertisement single OR double sided to never miss any clients attention.



### 2500 nits

Maximum brightness the display panels can deliver amazingly vivid imagery anywhere during daytime and nighttime conditions.



### up to 4K

Depending on the size, this stele offers a resolution between Full HD and 4K to display your content in perfect colors and vivid details.



### Waterproof & Dustproof

Unique full-sealed enclosure for outdoor use, Waterproof and dustproof.



### Anti-Glare

Optical technology diffuses mirror-like reflections and bright lights to help keep what's on your screen clear and visible.



### Touch Capability

This display features touch capabilities, allowing you to interact with customers more effectively and efficiently.



# Specifications 49"



## Display

Panel Type:	TFT - LCD
Model No.:	US-TH490 YDH
Size:	49"
Resolution:	1920 x 1080 (Full HD)
Brightness:	2500 cd/m2
Contrast (Typ):	5000 : 1
Orientation:	Portrait
Operating Hours:	24 / 7
Response time:	5 ms
Aspect ratio:	16 : 9
Display Area W x H:	604 x 1073,8 mm



## Touch

Specification:	Nano Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	8192 x 8192



## Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



## Power

Input:	AC100V~240V 50/60 HZ
Max. Power consumption:	≤ 220 W single side ≤ 440 W double side
Standby consumption:	≤ 30 W single side ≤ 60 W double side
Air Conditioner consumption:	450 W



## Environment

Operation Temperature:	-40 ~ 55 C
Operation Humidity:	10% ~ 90 %
Temperature Control System:	Air-conditioner
Brightness Control:	Automatic light sensor System
Waterproof grade:	Outdoor IP55



## Medioplayer

Android SoC Player:	RK3568 - Android 11 - 4/32 GB, RK3588 - Android 13 - 16/128 GB
---------------------	---



## Connectivity

WLAN	2,4 / 5 GHZ
SIM	4G / 5G
HDMI in	1 x
VGA in	1 x
USB	1 x



## Physical


Bezel Color:	Black, Metal case SPCC
Protective Glass:	AR Glass
Installation:	Floor Standing



## Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard:	ISO9001, CCC

# Dimensions 49"

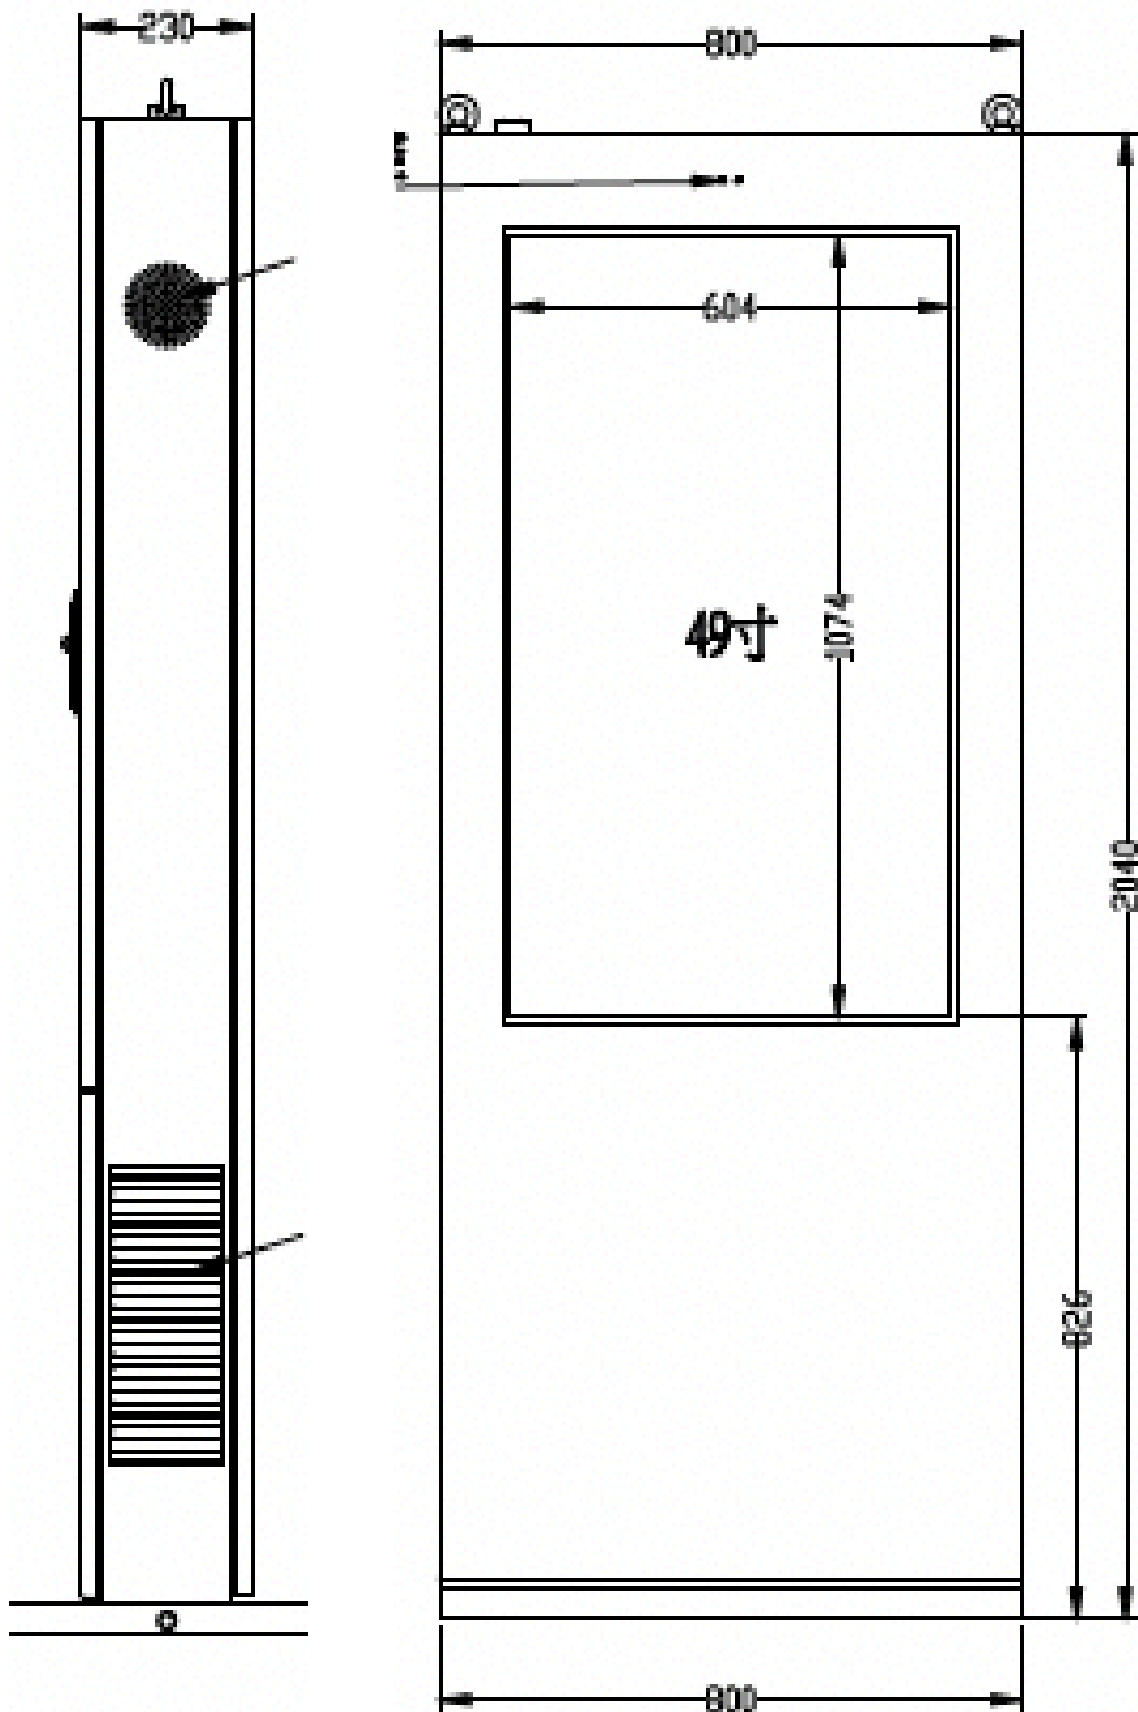

# Specifications 55"



## Display

Panel Type:	TFT - LCD
Model No.:	US-TH550 YDH
Size:	55"
Resolution:	1920 x 1080 (Full HD)
Brightness:	2500 cd/m2
Contrast (Typ):	4000 : 1
Orientation:	Portrait
Operating Hours:	24 / 7
Response time:	5 ms
Aspect ratio:	16 : 9
Display Area W x H:	680,4 x 1209,6 mm



## Touch

Specification:	Nano Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096



## Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



## Power

Input:	AC100V~240V 50/60 HZ
Max. Power consumption:	≤ 310 W single side ≤ 620 W double side
Standby consumption:	≤ 30 W single side ≤ 60 W double side
Air Conditioner consumption:	450 W



## Environment

Operation Temperature:	-40 ~ 55 C
Operation Humidity:	10% ~ 90 %
Temperature Control System:	Air-conditioner
Brightness Control:	Automatic light sensor System
Waterproof grade:	Outdoor IP65



## Medioplayer

Android SoC Player:	RK3568 - Android 11 - 4/32 GB, RK3588 - Android 13 - 16/128 GB
---------------------	---



## Connectivity

WLAN	2,4 / 5 GHZ
SIM	4G / 5G
HDMI in	1 x
VGA in	1 x
USB	1 x



## Physical






Bezel Color:	Black, Metal case SPCC
Protective Glass:	AR Glass
Installation:	Floor Standing



## Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard:	ISO9001, CCC

# Dimensions 55"

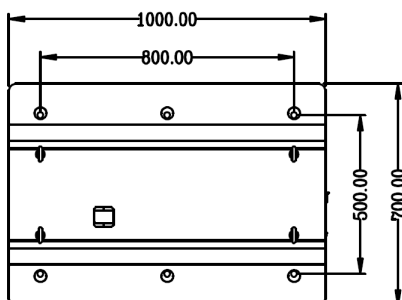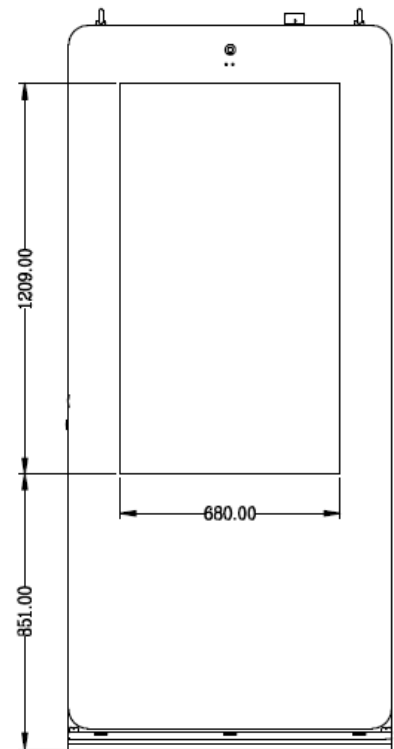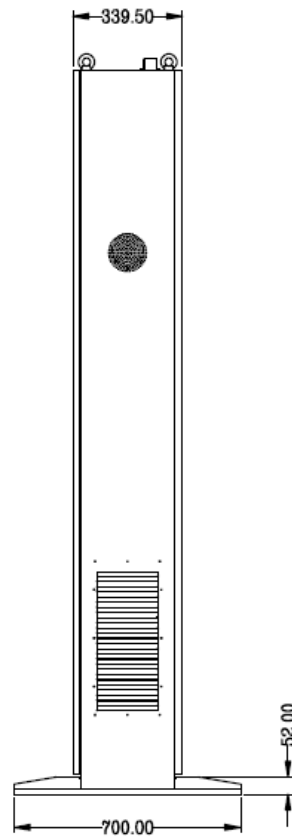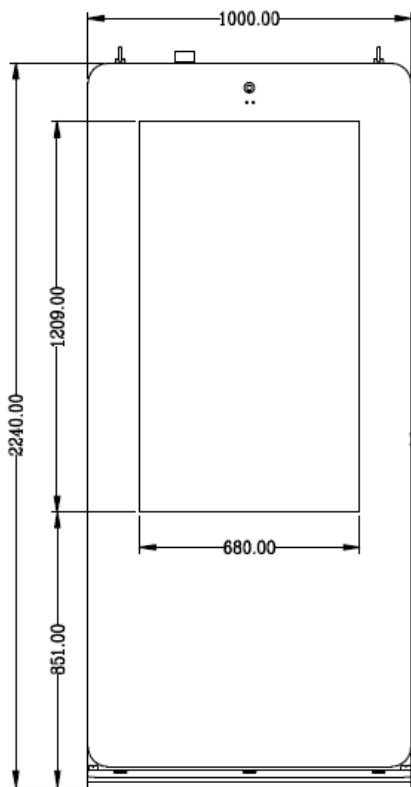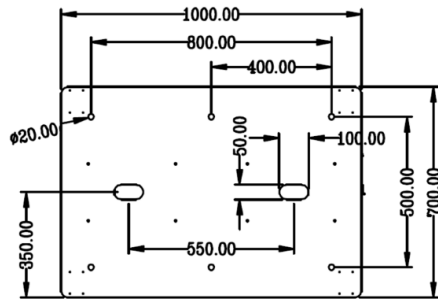

# Specifications 65"



## Display

Panel Type:	TFT - LCD
Model No.:	US-TH650 YDH
Size:	65"
Resolution:	1920 x 1080 (Full HD)
Brightness:	2500 cd/m2
Contrast (Typ):	5000 : 1
Orientation:	Portrait
Operating Hours:	24 / 7
Response time:	5 ms
Aspect ratio:	16 : 9
Display Area W x H:	803 x 1423 mm



## Touch

Specification:	Nano Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096



## Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



## Power

Input:	AC100V~240V 50/60 HZ
Max. Power consumption:	≤ 330 W single side ≤ 660 W double side
Standby consumption:	≤ 30 W single side ≤ 60 W double side
Air Conditioner consumption:	870 W



## Environment

Operation Temperature:	-40 ~ 55 C
Operation Humidity:	10% ~ 90 %
Temperature Control System:	Air-conditioner
Brightness Control:	Automatic light sensor System
Waterproof grade:	Outdoor IP55



## Medioplayer

Android SoC Player:	RK3568 - Android 11 - 4/32 GB, RK3588 - Android 13 - 16/128 GB
---------------------	---



## Connectivity

WLAN	2,4 / 5 GHZ
SIM	4G / 5G
HDMI in	1 x
VGA in	1 x
USB	1 x



## Physical




Bezel Color:	Black, Metal case SPCC
Protective Glass:	AR Glass
Installation:	Floor Standing



## Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard:	ISO9001, CCC

# Dimensions 65"

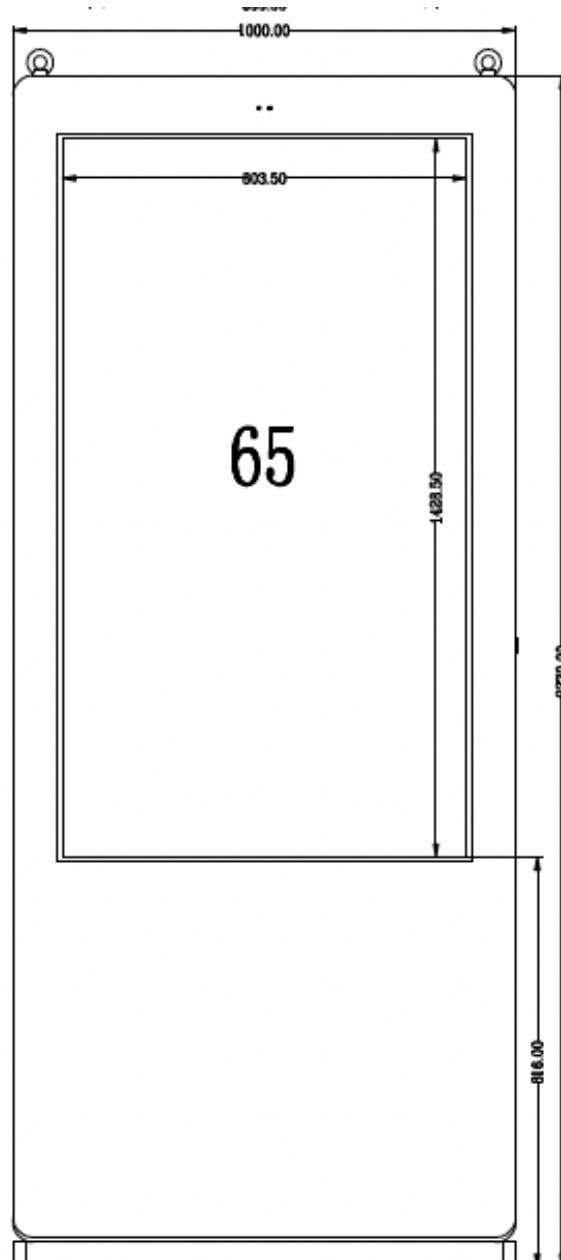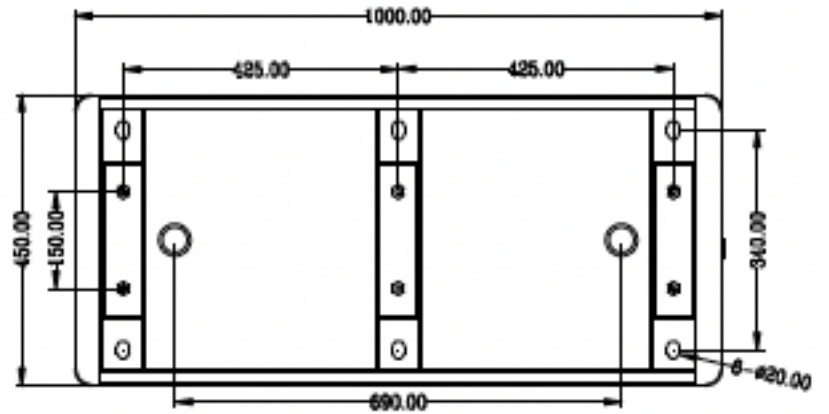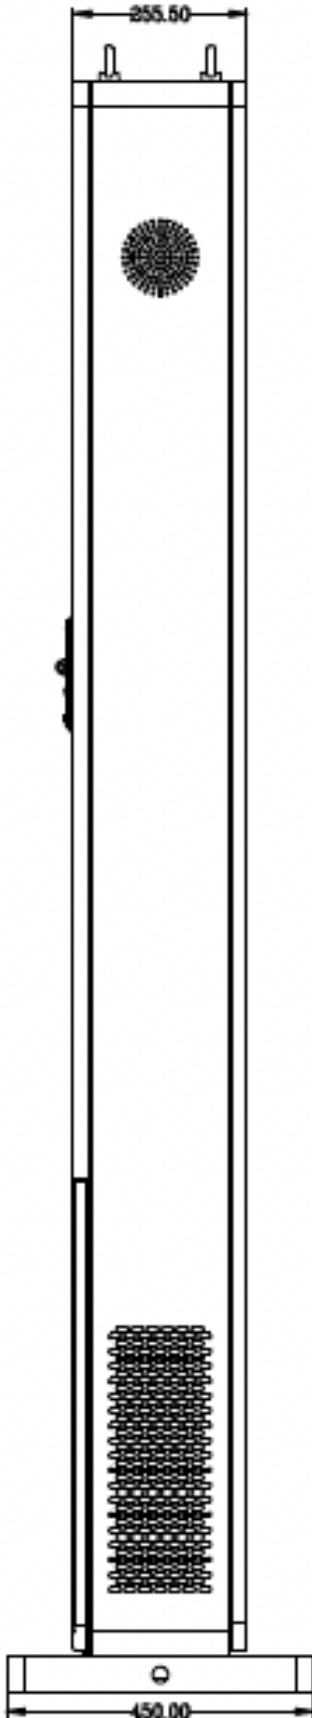

# Specifications 75"



## Display

Panel Type:	TFT - LCD
Model No.:	US-TH750 YDH
Size:	75"
Resolution:	3840 x 2160 (4K)
Brightness:	2500 cd/m2
Contrast (Typ):	5000 : 1
Orientation:	Portrait
Operating Hours:	24 / 7
Response time:	5 ms
Aspect ratio:	16 : 9
Display Area W x H:	927 x 1649 mm



## Touch

Specification:	Nano Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096



## Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



## Power

Input:	AC100V~240V 50/60 HZ
Max. Power consumption:	≤ 500 W single side ≤ 1000W double side
Standby consumption:	≤ 30 W single side ≤ 60 W double side
Air Conditioner consumption:	870 W



## Environment

Operation Temperature:	-40 ~ 55 C
Operation Humidity:	10% ~ 90 %
Temperature Control System:	Air-conditioner
Brightness Control:	Automatic light sensor System
Waterproof grade:	Outdoor IP55



## Medioplayer

Android SoC Player:	RK3568 - Android 11 - 4/32 GB, RK3588 - Android 13 - 16/128 GB
---------------------	---



## Connectivity

WLAN	2,4 / 5 GHZ
SIM	4G / 5G
HDMI in	1 x
VGA in	1 x
USB	1 x



## Physical

Bezel Color:	Black, Metal case SPCC
Protective Glass:	AR Glass
Installation:	Floor Standing




## Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard:	ISO9001, CCC



# Dimensions 75"

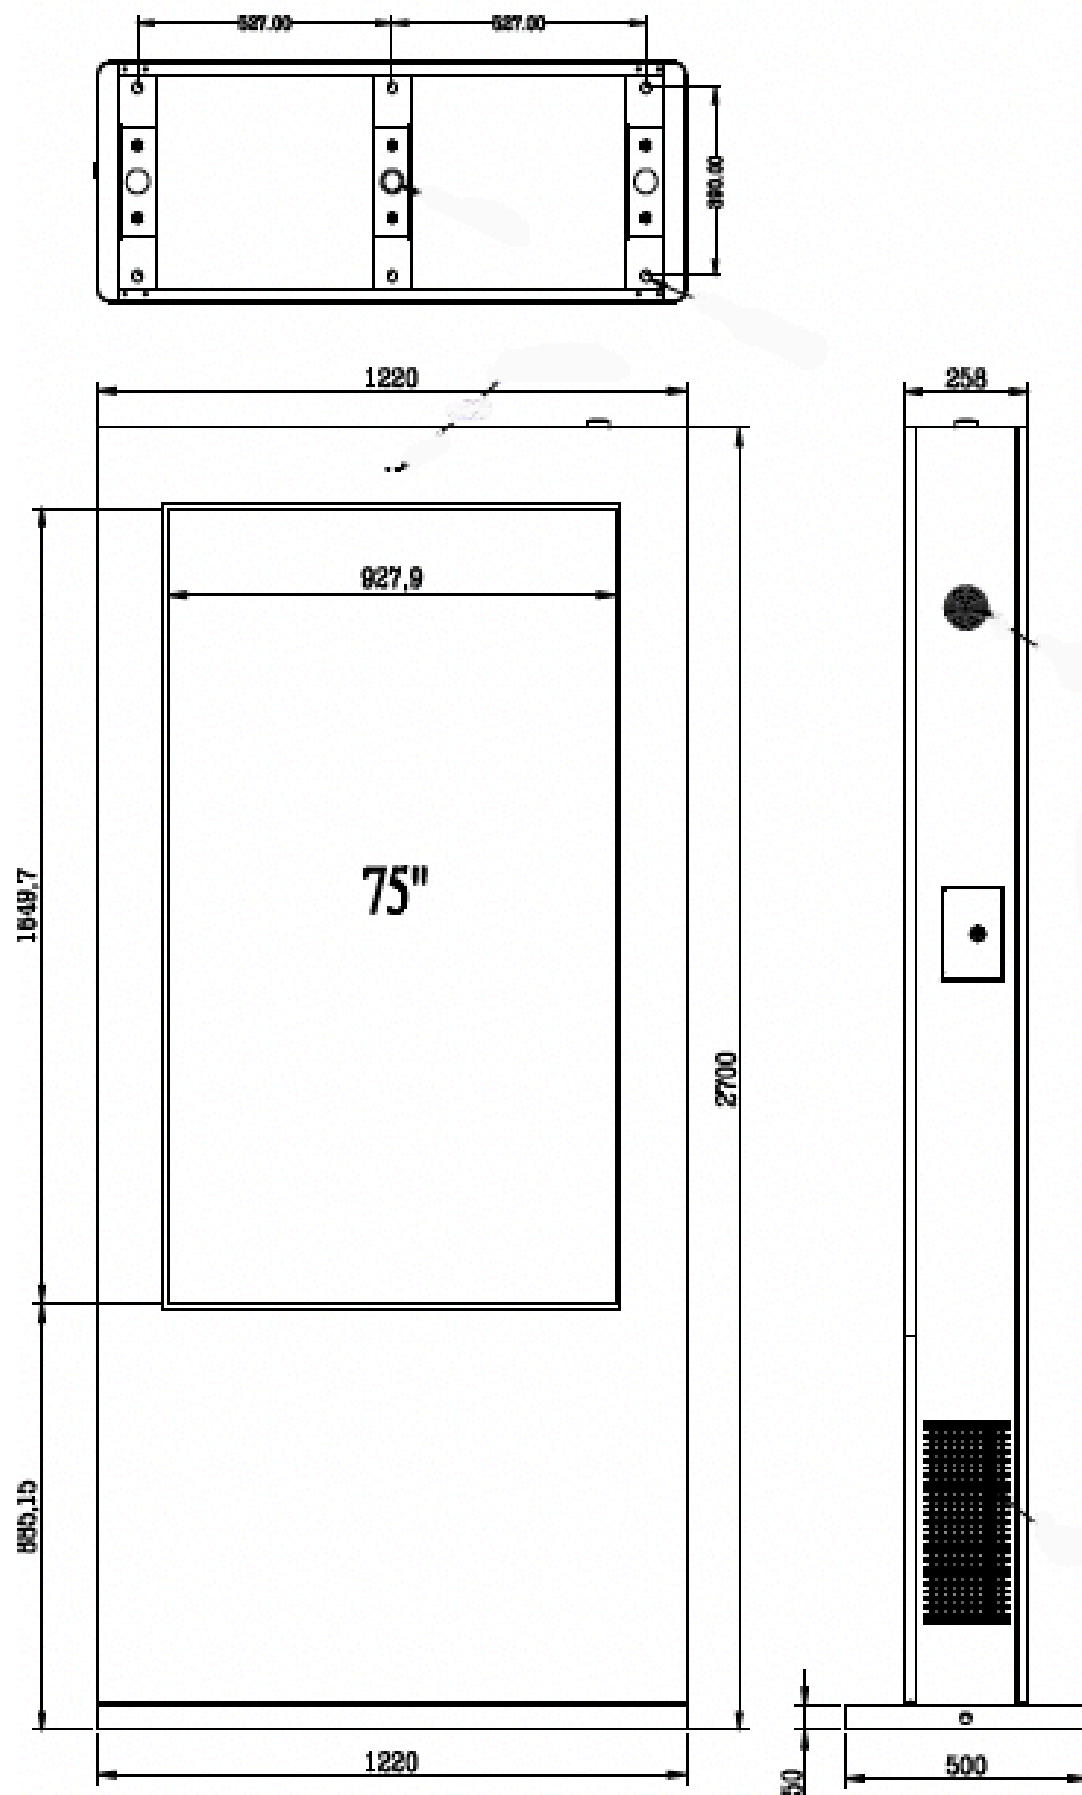

# Specifications 86"



## Display

Panel Type:	TFT - LCD
Model No.:	US-TH860 YDH
Size:	86"
Resolution:	3840 x 2160 (4K)
Brightness:	2500 cd/m2
Contrast (Typ):	5000 : 1
Orientation:	Portrait
Operating Hours:	24 / 7
Response time:	5 ms
Aspect ratio:	16 : 9
Display Area W x H:	1065 x 1895 mm



## Touch

Specification:	Nano Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096



## Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



## Power

Input:	AC100V~240V 50/60 HZ
Max. Power consumption:	≤ 1100 W single side ≤ 2200W double side
Standby consumption:	≤ 30 W single side ≤ 60 W double side
Air Conditioner consumption:	1750 W



## Environment

Operation Temperature:	-40 ~ 55 C
Operation Humidity:	10% ~ 90 %
Temperature Control System:	Air-conditioner
Brightness Control:	Automatic light sensor System
Waterproof grade:	Outdoor IP55



## Medioplayer

Android SoC Player:	RK3568 - Android 11 - 4/32 GB, RK3588 - Android 13 - 16/128 GB
---------------------	---



## Connectivity

WLAN	2,4 / 5 GHZ
SIM	4G / 5G
HDMI in	1 x
VGA in	1 x
USB	1 x



## Physical

Bezel Color:	Black, Metal case SPCC
Protective Glass:	AR Glass
Installation:	Floor Standing



## Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard:	ISO9001, CCC

# Dimensions 86"

